
talleres trepat door closers, brakes & blue line

OJustor



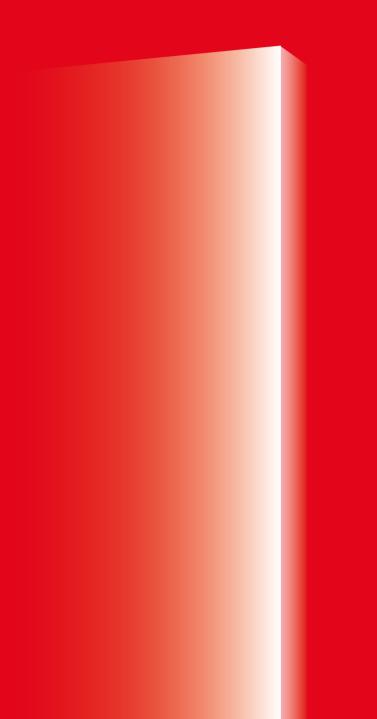

index OJustor

1 introduction

who are we	6
our products	12

2 door closers

door closer CH	16
door closer TP	20
accessories CH / TP	23
features CH / TP	24

3 | retaining brakes

retaining brake FR	30
retaining brake FR sst	32
retaining brake RA	36
accessories FR	39
features FR / RA	40

4 | antipanic

antipanic AP	44
antipanic PB	46
accessories AP / PB	48
features AP / PB	49

5 | complements

selector de porta CO	52
fixador de porta CO	54
elevador centrador	56
regulable d'aire CO	

6 | codes

our products	60 - 63
blue line	64 - 65



7


A family-run business formed by a team whose mission is to manufacture all the **JUSTOR** products with the highest quality and warranty


Objective: quality assurance, prestige and brand pride

For more than 75 years at **Talleres Trepat S.A.** we have been constantly working to reach the leadership as manufacturers of closing systems for all types of doors.

We design and manufacture all the elements using high-quality materials in **aluminum**, as well as in **iron**, **stainless steel** and/or **plastic**.

In order to offer our clients the best warranty in terms of durability and quality, each element is always tested at **our in-house lab**. Moreover, all of our certified products are CE **marked** under the regulations EN 1154, EN 1125 and EN 1158 that allow their installation on **fire doors (FR)**.

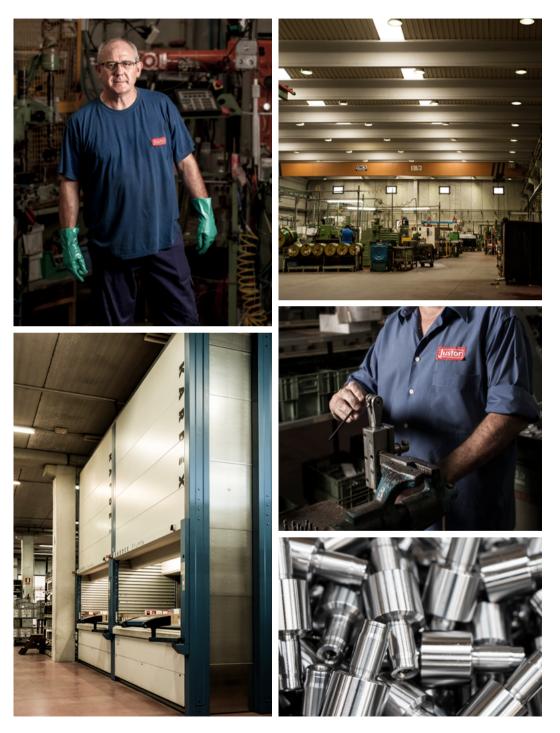

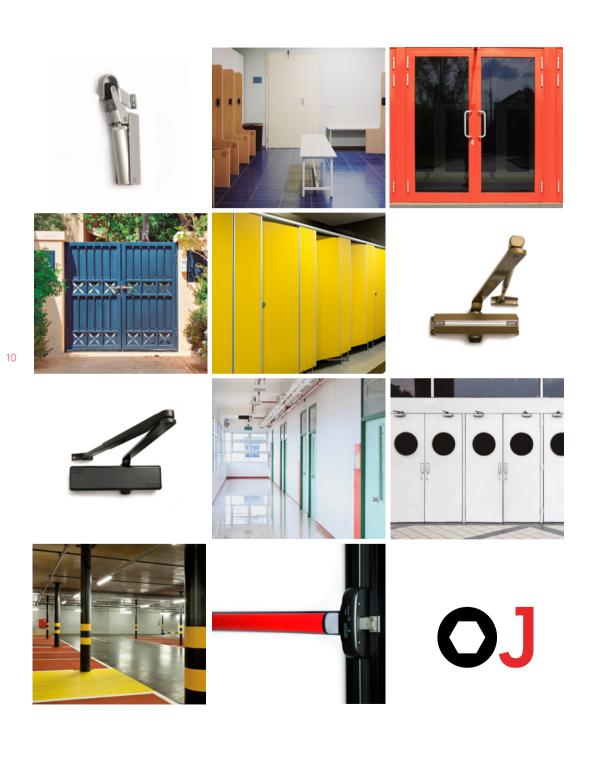

Solutions for all types of doors

At **Justor** we offer all kinds of mechanisms and self-closing devices for every type of door such as door closers, spring hinges and paumelles, retaining brakes, antipanic exit devices and other complements and accessories for doors.

We design and manufacture all our products in Barcelona with the highest quality and warranty. We offer solutions to cover the needs present in such various markets as metal, wood, the food industry, health, aeronautical etc.

Our products

At Justor we design and produce the best solutions for the closing of all types of doors. All of our products meet the highest quality and performance requirements.



Door closers. Available with arm set. Ready to resist frequent and/or intensive usage, on doors up to 120 kg.



Retaining brakes. They prevent doors from slamming and ensure the total and silent closing of the door.



Hinges. Always with a laminated spring set inside, for all types of doors, from screen doors of only 5 kg to swing doors of 60 kg and iron doors of 250 kg.

(ask for our exclusive spring hinges catalogue at: trepatventas@justor.com or at www.justor.com)



Single and double action spring hinges and paumelles

Blue line

We broaden our market offer with products that are entirely manufactured by us. These products comply with our quality and reliability requirements that define all references within our range.



Antipanic. Overlapping mechanisms. 100% reversible. Certified to be installed on fire doors.



Complements. Complementary products for doors and windows. Addressed to the professional field of aluminium and wood.

door closers

OJustor

5
0
3
4

Door closers suitable to operate on doors with a lot of traffic.

OJustor



OJustor

СН

door closer

CH

This high-performance door closer is able to work under the most demanding circumstances. BASIC models are certified according to the EN 1154 norm and with CE marking for its installation on fire doors (FR).




Uses

They can be installed on every surface, on inward and outward openings, as well as in every field, either residential and industrial.


Features

- Manufactured in aluminium and iron
- Available in silver, gold, bronze, white, black, stainless steel effect, and other special colours
- Size of 185 or 210 mm depending on the model
- 1.000.000 opening and closing cycles
- Load capacity: EN 1 (20 kg) -EN 6 (120 kg)
- Hold-open option to keep the door open
- Adjustable closing speed








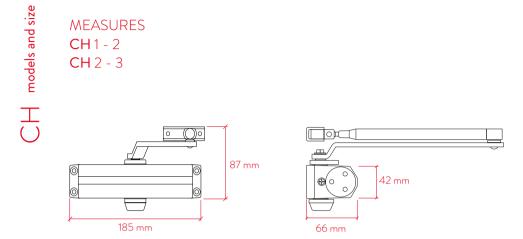


MODELS	Strength (EN)	Door width (cm)	Door weight (kg)	Opening and closing systems
CH1-2	1	75	20	BASIC / RL
CITI-2	2	85	40	BASIC / RL
CH 2 - 3	2	85	40	BASIC** / RL / PR / BC
	3*	95	60	DAJIC / RL/PR/DC

*EN 1154



Description and opening/closing adjustments at pages 26 / 27.

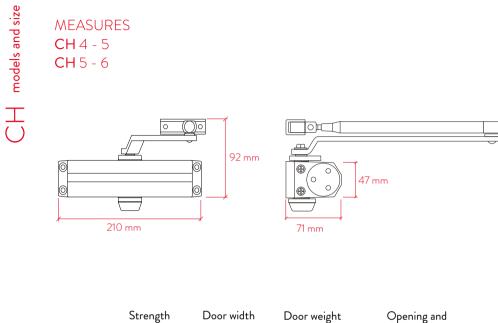

MODELS	(EN)	(cm)	Door weight (kg)	closing systems
CH 4 - 5	4*	110	80	BASIC** / PR / FF
	5*	125	100	BASIC / PR / FF
CH 5 - 6	5*	125	100	BASIC** / PR / FF
	6*	140	120	DASIC / PR / FF

*EN 1154



Description and opening/closing adjustments at pages 26 / 27.



door closer TP

Door closer with overcharge valve. Able to exceed 500.000 door cycles. Especially suitable for accesses with high levels of transit.



Uses


It can be installed either on doors with a left and right opening, whenever a soft and safe closing of the door is required.

Features

- Manufactured in aluminium and iron

- Available in silver, gold, bronze, white, black, and other special colours


- Size of 232 mm
- 1,000,000 opening and closing cycles
- Load capacity: EN 2 (40 kg) -EN 6 (120 kg)
- Opening angle up to 180°
- Adjustable closing speed








MEASURES **TP** (all the models)

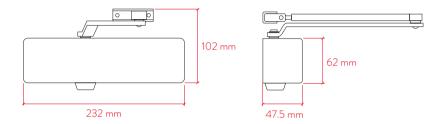

MODELS	Strength (EN)	Door width (cm)	Door weight (kg)	Opening and closing systems
	2	85	40	
TP 2 - 3 - 4	3	95	60	BASIC / PR / FF / TR
	4	110	80	
	4	110	80	
TP 4 - 5 - 6	5	125	100	BASIC / PR / FF / TR
	6	140	120	



Description and opening/closing adjustments at pages 26 / 27.

Accessories CH / TP




arm tube CH 35-95


arm tube CH 95-155

Recommended for interior installations with outward opening where the frame superimposes the door leaf in between 35 and 95 mm.

Recommended for interior installations with outward opening where the frame

superimposes the door leaf in between








arm tube TP 95-175

95 and 155 mm.

Recommended for interior installations with outward opening where the frame superimposes the door leaf in between 95 and 175 mm.





lever rod PR 30-80

Recommended for interior installations with outward opening where the frame superimposes the door leaf in between 30 and 80 mm. In the case of models with a retention arm (PR).






glass door U adapter for CH and TP

An U adapter for door closers CH1, CH4 and TP. Allows the product installation on glass doors.



adapted plate TP

Adapted plate TP to be installed on narrow profiles (minimum 25 mm) on doors with an inward opening.





100 -

10°

We offer the widest range of opening and closing systems of models CH and TP

BASIC

. 180°

-180°

180

90°

This model always closes the door, regardless of the opening angle.


RL (free retention)

The door can be left open from 90°. The door can open until 180°, but the return and closing function does not operate until it reaches the 90°. The interior retention is not adjustable. A perfect model for shops and spaces on the street level.

PR (retention lever)

The exact point at which we want the door to be left open can be chosen. It holds and stops the door when closing from that point onwards. Suitable to ease the access with shopping carts or strollers thanks to the door retention.

(Adjustment details of PR at page 28)

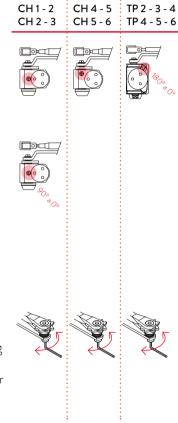

-180°

80'

FF

Model with 2 adjustment valves. One valve adjusts the closing speed from 180° to 15°, while the other operates from 15° until the total closing of the door. Recommended for installations with regular draughts of air.

TR

. 180°

Model with double speed. 2 valves allow to adjust speed from 180° to 80° and from 80° until closing. This door closer is specifically recommended to ease the access for persons with a reduced mobility.

BC

. 180° 10°

This model controls the opening from 70°. It dampens the opening in order to avoid undesired blows. Especially recommendable for doors with a 90° maximum opening.



CH 4 - 5

CH 5 - 6

TP 2 - 3 - 4


TP 4 - 5 - 6


CH1-2


CH 2 - 3

°°

PR lever adjustment







Door closers with the PR system (retention arm) can be adjusted to select the exact point in which we want the door to stay open and blocked.


To adjust them we need to follow these 4 essential steps:

1 Install the door closer in a standard way (according to model and template).

2 Loosen the end of the arm by means of a wrench key until the lever can be moved. Do not remove the screw.

3 Put the lever of the arm at the desired retention angle.

4 Tighten again the end of the arm making sure that the position of the teeth is the right one.



Final blow regulation for all CH and TP models


There are three different types of arms for Justor door closers. The final strike is always regulated by expanding or reducing the length of the extensible part of the arm.

The longer the extensible part, the stronger the final strike. When the length is reduced, the final strike diminishes in strength.







TP lever





PR lever





retaining brakes

OJustor

retaining brake FR30retaining brake FR inox32retaining brake RA36accessories FR39features FR / RA40

Retaining brakes that avoid door slams caused by draughts and ensure the correct closing of the door. our products



retaining brake **FR**

The Justor FR retaining brake eliminates door slams caused by a bad usage of the door or self-closing devices being previously installed. It ensures the total closing of the door.



Uses

Neighbourhood communities, sliding doors, paint booths, pressure booths, school doors, greenhouses, doors with electric locks, among others.

Features

- Manufactured in aluminium and iron

- Available in silver, gold, bronze, white, black, and other special colours

- Size of 174 or 190.5 mm

depending on the model


- More than 250.000 opening and closing cycles

- Load capacity: FR 0 (15 kg) -


FR 3 (100 kg)

- Adjustable closing speed







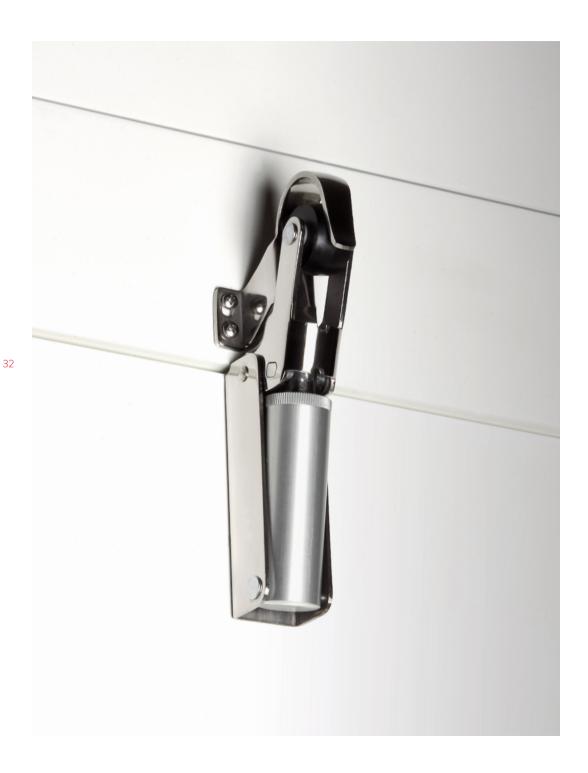

FR

retaining brake **FR**

The retaining brake eliminates door slams. Manufactured in stainless steel, this tool is designed to work under the most unfavourable weather conditions. It operates in the last 10°, thus ensuring the complete closing of the door.



Uses


Doors in the food industry, industrial refrigerators, accesses to private properties and/or swimming pools, saunas or different traffic areas in the naval sector.

Features

- Manufactured in polished stainless steel AISI 304 - Available in inox (for interior or exterior doors) or full inox (suitable for marine environments)

Size of 174 or 190.5 mm
depending on the model
More than 250.000 opening and closing cycles
Load capacity: FR 0 (15 kg) - FR 3 (100 kg)


- Adjustable closing speed (G models)





MEASURES FR 0 / FR 0 G FR 1 / FR 1 G

 FR models and size

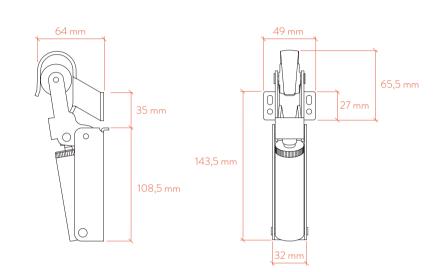


MODE	ELS	Strength (N)	Door width (cm)	Door weight (kg)
FR 0	FR 0 G*	30	75	15
FR 1	FR1G*	60	85	40

*G - adjustable closing speed

FR models and size	MEASURES FR 2 / FR 2 G FR 3 / FR 3 G	
FR	64 mm 35 mm 125 mm	160 mm

MODELS		Strength (N)	Door width (cm)	Door weight (kg)
FR 2	FR 2 G*	80	110	80
FR 3	FR 3 G*	115	125	100

*G -adjustable closing speed

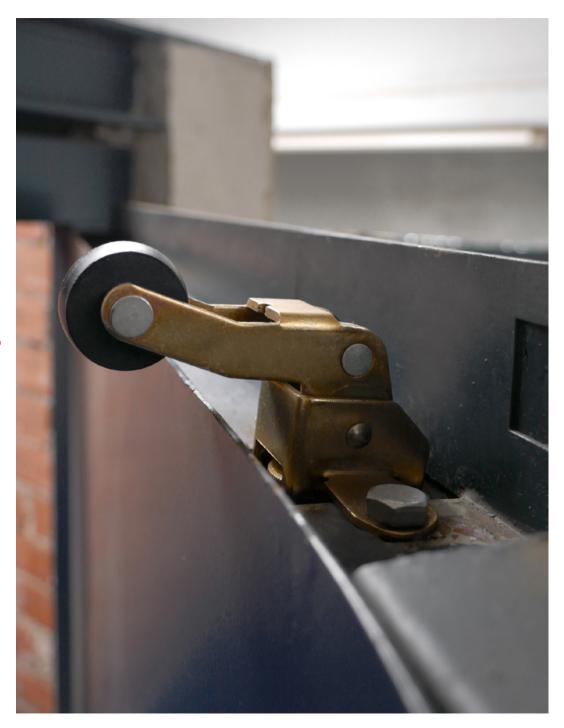

retaining brake for elevator doors

RA

Specific product intended to be installed into the door. Adjustable closing speed. It avoids door slams and ensures a silent and effective closing.



Uses


Suitable for elevator doors in communities, industrial lifts, freight lifts etc.

Features

- Manufactured in aluminium and iron

- Available in silver, gold, bronze, white, black, and other special colours

- 3 models depending on the type of door
- Size of 208 mm
- More than 250.000 opening and closing cycles
- Load capacity: 80 kg
- Always adjustable closing speed










 RA models and size





RA 4G





38





MODELS	Strength (N)	Door width (cm)	Door weight (kg)
RA 3 G*	80	110	80
RA 4 G*	80	110	80
RA 7 G*	80	110	80

*G - adjustable closing speed

Accessories FR



standard hook


It is supplied as standard. It works on the same plane as the retaining brake.





short hook

For installations where the frame protrudes slightly from the door.





special flat hook


Ideal for situations where the door fits inside the frame. The working range is between 7,5 mm and 24,5 mm.





supplement hook chrome


Enables installation in situations where the wall above the frame is displaced inside 10-27 mm.





hook fitting plate

It allows the retaining brake installation on doors with a narrow frame (minimum 16 mm).





bracket for sliding door

Special accessory to work on sliding doors.



Some considerations on FR, FR G and RA G

Why choose a G model?

The fundamental difference between the basic model and the **adjustable model (G)** lies in the closing. With the adjustable models we can choose to **expand or diminish the closing time in beween 1 and 10 seconds** by opening or closing the oil flow.

Adjusting the speed is easy and quick. We can adjust it in only two steps and it can be modified whenever it is necessary.

The G model is especially indicated to be installed in schools, delaying the closure and thus avoiding any fingers to get stuck. Applications in hospitals where doors must close with no sounds and effectively are also highly recommended.

NOT adjustable models


fixed closing time of **5 seconds** in the last 10° closing.


G models

adjustable closing speed in between 1 and 10 seconds in the last 10° closing.





proper installation in the center of the door











antipanics

OJustor

blue line

antipanic reversible modular AP	44
antipanic reversible push-bar PB	46
accessories AP / PB	48
features AP / PB	49

Antipanics certified according to European standard EN 1125 and suitable for fire doors with CE marking. All its components are reversible and combinable to obtain closure of 1, 2 or 3 points.



antipanic reversible modular

Reversible antipanic device. The latch is always made of stainless steel, thus permitting its installation on fire doors (RF). The body of the antipanic device has a compact design of only 12,6 cm of height.



Uses

Parking emergency exits, industrial buildings, shopping centers, sports centers, etc.

Features

- Manufactured in aluminium and stainless steel


- Bar-type model
- 8.7 cm between fixing points (door-bar support)

- Latch activates with 2 mm of pressure

- Suitable for doors up to 2.66 m in height

- Compatible with extension pieces for doors up to 3 m

Horizontal bar finishes







antipanic reversible push-bar **PB**

Reversible antipanic device (PUSH-BAR type). We can take advantage of its reversibility during installation by means of the "one second system".



Uses

Emergency exits in schools, theaters, cinemas, offices or convention centers.


Features

- Manufactured in aluminium and stainless steel
- Bar-type model

- Fixing system with two components mounted simultaneously: one (hookshaped) prevents play in the mechanism and bar; the other (flat piece) provides structural stability


- Suitable for doors up to 2.66 m in height

- Compatible with extension pieces for doors up to 3 m





AP / PB accessories



handle outside trim / oval handle outside trim

Handle or oval handle model. Both available with the following mechanisms:

- Open/closed mechanism: it allows to always leave the access from the exterior opened or closed.

- Universal mechanism: it can perform the function of open/closed and unlocking by means of a key (this always implies a blocked access from the outside, being able to access only if you have a key).

Available in white, gray and black.





outer handle

This always implies an open access from the outside.


Available in white, gray and black.





outer cylinder drive

Unlocking by means of a key mechanism. This always implies a blocked access from the outside, being able to access only if you have a key. Access only to authorized personnel.



vertical rods (with vertical or lateral latch bolts)


Mechanisms to add closing points for safety reasons. The vertical latch system can be installed on the passive leaf in accesses with a double door and the lateral one in accesses with one single door. Height up to 2,66 m or extensions up to 3 m.

Available in white, black, gray and steel effect.



AP













1 point


2 points


3 points


PB












complements

OJustor

blue line

door selector CO	52
door fixer CO	54
inflatable air wedge CO	56

Complements for additional needs on single or double doors.

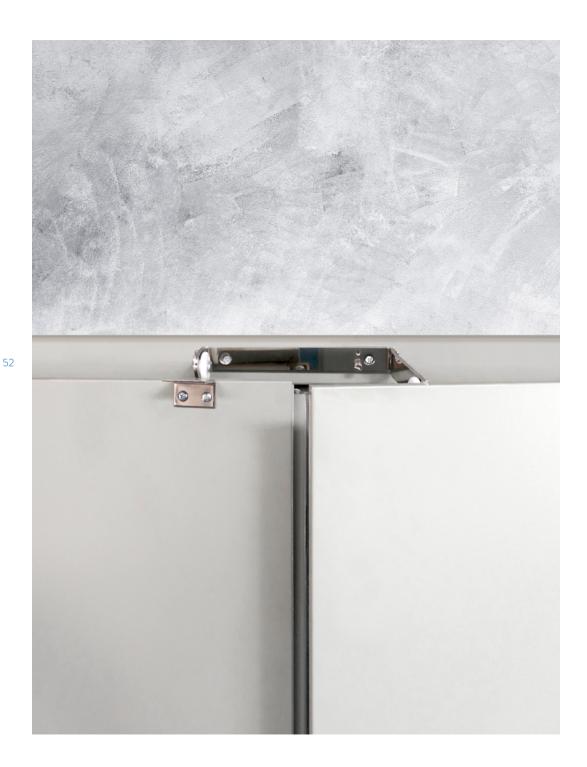

door selector

In accesses with a double door, it always ensures the closing of the passive leaf prior to the active one, thus ensuring a safe and correct closing, this being particularly important on fire doors.



Uses


Double doors in hospitals, sports centers, lifts, emergency exits or fire doors.

Features

- Manufactured in aluminium
- Chromed steel finish
- Unique adjustable model
- 30 mm diameter wheels
- Reversible wheel mechanism

- More than 500.000 opening and closing cycles

- Complies with EN 1158 standard and CE marking











door fixer

Blocking system with rubber top to leave the door open. Fast blocking activation and deactivation through steel blade.



Uses


All types of interior doors, whether in offices, in community portals, in commercial premises or in industrial buildings.

Features


- Manufactured in zamak (zinc, aluminium, magnesium, and copper alloy)

- Polished finish
- Unique model
- Direct fixation to the door with screws
- Includes installation template in the blister pack







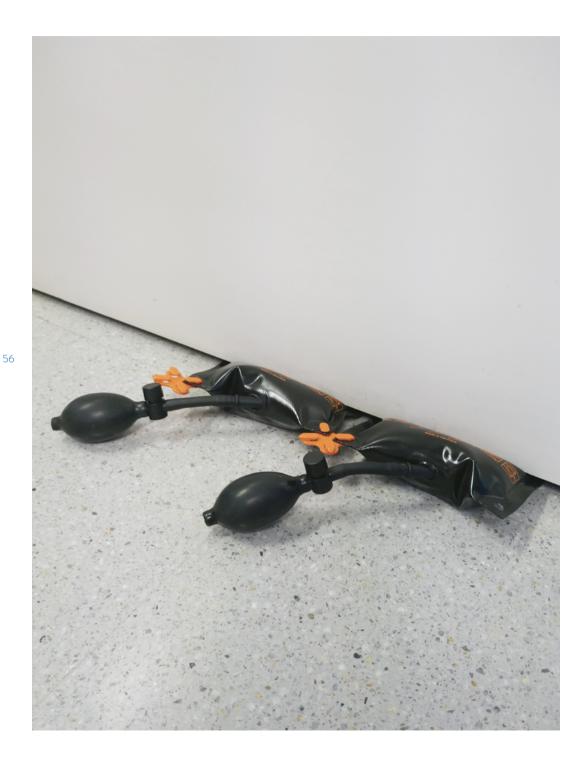

CO

inflatable air wedge

Reinforced fabric airbag for structure levelling/elevation. Unique product in the market with the CONNECT feature that enhances security. Load capacity of 135 kg. Pressure control by means of a valve.




Uses

Installation and levelling of doors, windows, panels, skirting boards etc., complementing or efficiently replacing the traditional wedges and avoiding scratches and damages. It allows to easily install and uninstall doors fitted with paumelles.

Features

- Manufactured with reinforced fibre
- Unique colour
- Dimensions 160 x 160 mm
- Load capacity: 135 kg per unit
- Inflation sleeve and deflation valve
- Used for thicknesses from 2 to 50 mm
- Up to 50 mm lift with load



codes

codes

OJustor

door closer CH	60
door closer TP	61
retaining brake FR	62
retaining brake RA	62
accessories CH / TP	63
accessories FR	63
antipanic AP	64
antipanic PB	64
accessories AP / PB	65
spare parts AP / PB	65
complements CO	65



Door closer CH

Packaging: 6 or 12 units box / 6 units blister

			Box (x1)	Blister (x1)	_			Box (x1)	Blister (x1)
CH BASIC	CH 1-2 BASIC	Silver Gold Bronze White Black SST efect Special	1212.01 1212.02 1212.03 1212.06 1212.09 1212.19 1212.99	1213.01 1213.02 1213.03 1213.06 1213.09 - 1213.99	CHPR	CH 2-3 PR	Silver Gold Bronze White Black SST efect Special	1332.01 1332.02 1332.03 1332.06 1332.09 1332.19 1332.99	1333.01 1333.02 1333.03 1333.06 1333.09 - 1333.99
	CH 2-3 BASIC CE	Silver Gold Bronze White Black SST efect Special	1312.01 1312.02 1312.03 1312.06 1312.09 1312.19 1312.99	1313.01 1313.02 1313.03 1313.06 1313.09 - 1313.99		CH 4-5 PR	Silver Gold Bronze White Black SST efect Special	1432.01 1432.02 1432.03 1432.06 1432.09 1432.19 1432.99	1433.01 1433.02 1433.03 1433.06 1433.09 - 1433.99
	CH 4-5 BASIC CE	Silver Gold Bronze White Black SST efect Special	1412.01 1412.02 1412.03 1412.06 1412.09 1412.19 1412.99	1413.01 1413.02 1413.03 1413.06 1413.09 - 1413.99		CH 5-6 PR	Silver Gold Bronze White Black SST efect Special	1532.01 1532.02 1532.03 1532.06 1532.09 1532.19 1532.99	1533.01 1533.02 1533.03 1533.06 1533.09 - 1533.99
	CH 5-6 BASIC CE	Silver Gold Bronze White Black SST efect Special	1512.01 1512.02 1512.03 1512.06 1512.09 1512.19 1512.99	1513.01 1513.02 1513.03 1513.06 1513.09 - 1513.99	CHFF	CH 4-5 FF	Silver Gold Bronze White Black SST efect Special	1452.01 1452.02 1452.03 1452.06 1452.09 1452.19 1452.99	1453.01 1453.02 1453.03 1453.06 1453.09 - 1453.99
CH RL	CH 1-2 RL CH 2-3	Silver Gold Bronze White Black SST efect Special Silver	1222.01 1222.02 1222.03 1222.06 1222.09 1222.19 1222.99 1322.01	1223.01 1223.02 1223.03 1223.06 1223.09 - 1223.99 1323.01		CH 5-6 FF	Silver Gold Bronze White Black SST efect Special	1552.01 1552.02 1552.03 1552.06 1552.09 1552.19 1552.99	1553.01 1553.02 1553.03 1553.06 1553.09 - 1553.99
	RL	Gold Bronze White Black SST efect Special	1322.01 1322.02 1322.03 1322.06 1322.09 1322.19 1322.99	1323.02 1323.03 1323.06 1323.09 - 1323.99	CH FF-PR	CH 4-5 FF-PR	Silver Gold Bronze White Black SST efect Special	1472.01 1472.02 1472.03 1472.06 1472.09 1472.19 1472.99	1473.01 1473.02 1473.03 1473.06 1473.09 - 1473.99
CH BC	CH 2-3 BC	Silver Gold Bronze White Black SST efect Special	1362.01 1362.02 1362.03 1362.06 1362.09 1362.19 1362.99	1363.01 1363.02 1363.03 1363.06 1363.09 - 1363.99		CH 5-6 FF-PR	Silver Gold Bronze White Black SST efect Special	1572.01 1572.02 1572.03 1572.06 1572.09 1572.19 1572.99	1573.01 1573.02 1573.03 1573.06 1573.09 - 1573.99



			Box (x1)
TP BASIC	TP 2-3-4 BASIC TP 4-5-6 BASIC	Silver Gold Bronze White Black Special Silver Gold Bronze White Black	9012.01 9012.02 9012.03 9012.06 9012.09 9012.99 9512.01 9512.02 9512.03 9512.06 9512.09
TP PR	TP 2-3-4 PR	Special Silver Gold Bronze White Black Special	9512.99 9032.01 9032.02 9032.03 9032.06 9032.09 9032.99
	TP 4-5-6 PR	Silver Gold Bronze White Black Special	9532.01 9532.02 9532.03 9532.06 9532.09 9532.99
TP TR	TP 2-3-4 TR	Silver Gold Bronze White Black Special	9042.01 9042.02 9042.03 9042.06 9042.09 9042.99
	TP 4-5-6 TR	Silver Gold Bronze White Black Special	9542.01 9542.02 9542.03 9542.06 9542.09 9542.99
TP FF	TP 2-3-4 FF	Silver Gold Bronze White Black Special	9052.01 9052.02 9052.03 9052.06 9052.09 9052.99
	TP 4-5-6 FF	Silver Gold Bronze White Black Special	9552.01 9552.02 9552.03 9552.06 9552.09 9552.99

			Box (x1)
TP FF-PR	TP 2-3-4 FF-PR	Silver Gold Bronze White Black Special	9072.01 9072.02 9072.03 9072.06 9072.09 9072.99
	TP 4-5-6 FF-PR	Silver Gold Bronze White Black Special	9572.01 9572.02 9572.03 9572.06 9572.09 9572.99



Retaining brake FR Packaging: 24 units box / 12 units blister

	J.		Box (x1)	Blister (x1)
FR	FR 0	Silver Gold Bronze White Black Special	0012.01 0012.02 0012.03 0012.06 0012.09 0012.99	0013.01 0013.02 0013.03 0013.06 0013.09 0013.99
		SST All SST	0012.05 0012.15	0013.05 0013.15
	FR 1	Silver Gold Bronze White Black Special	0112.01 0112.02 0112.03 0112.06 0112.09 0112.99	0113.01 0113.02 0113.03 0113.06 0113.09 0113.99
		SST All SST	0112.05 0112.15	0113.05 0113.15
	FR 2	Plata Oro Bronce Blanco Negro Especial	0212.01 0212.02 0212.03 0212.06 0212.09 0212.99	0213.01 0213.02 0213.03 0213.06 0213.09 0213.99
		SST All SST	0212.05 0212.15	0213.05 0213.15
	FR 3	Silver Gold Bronze White Black Special SST All SST	0312.01 0312.02 0312.03 0312.06 0312.09 0312.99 0312.05 0312.15	0313.01 0313.02 0313.03 0313.06 0313.09 0313.99 0313.05 0313.15
FRG	FR 0 G	Silver Gold Bronze White Black Special	0022.01 0022.02 0022.03 0022.06 0022.09 0022.99	0023.01 0023.02 0023.03 0023.06 0023.09 0023.99
		SST All SST	0022.05 0022.15	0023.05 0023.15


		Box (x1)	Blister (x1)
FR1G	Silver	0122.01	0123.01
	Gold	0122.02	0123.02
	Bronze	0122.03	0123.03
	White	0122.06	0123.06
	Black	0122.09	0123.09
	Special	0122.99	0123.99
	SST	0122.05	0123.05
	ALL SST	0122.15	0123.15
FR 2 G	Silver	0222.01	0223.01
	Gold	0222.02	0223.02
	Bronze	0222.03	0223.03
	White	0222.06	0223.06
	Black	0222.09	0223.09
	Special	0222.99	0223.99
	SST	0222.05	0223.05
	ALL SST	0222.15	0223.15
FR 3 G	Plata	0322.01	0323.01
	Oro	0322.02	0323.02
	Bronce	0322.03	0323.03
	Blanco	0322.06	0323.06
	Negro	0322.09	0323.09
	Especial	0322.99	0323.99
	SST	0322.05	0323.05
	ALL SST	0322.15	0323.15



Lift retaining brake RA

	UH			
	~ 0		Box (x1)	
-	RA 3 G	Gold	I-0331.02	-
RA	RA 4 G	Gold	I-0431.02	-
	RA7G	Silver	I-0731.01	-

_







RA7 G

CH and TP accessories

CH / TP ACCESSORIES		Arm tube CH 35-95	Silver Gold Bronze White Black SST efect Special	51241.01 51241.02 51241.03 51241.06 51241.09 51241.19 51241.99
	8	Arm tube CH 95-155	Silver Gold Bronze White Black SST efect Special	51242.01 51242.02 51242.03 51242.06 51242.09 51242.19 51242.99
		Arm tube TP 95-175	Silver Gold Bronze White Black Special	59037.01 59037.02 59037.03 59037.06 59037.09 59037.99
		Lever rod PR 30-80	Silver Gold Bronze White Black SST efect Special	51345.01 51345.02 51345.03 51345.06 51345.09 51345.19 51345.99
		U adapter glass door CH1	Silver Gold Bronze White Chrome Black SST efect Special	51220.01 51220.02 51220.03 51220.06 51220.07 51220.09 51220.19 51220.99
		U adapter glass door CH4	Silver Gold Bronze White Chrome Black SST efect Special	51416.01 51416.02 51416.03 51416.06 51416.07 51416.09 51416.19 51416.99
		U adapter glass door TP	Silver Gold Bronze White Chrome Black Special	59033.01 59033.02 59033.03 59033.06 59033.07 59033.09 59033.99

i	Adapted	Silver	59240.01
[]	plate TP	Gold Bronze	59240.02 59240.03
		White	59240.06
		Black	59240.09
		Special	59240.99

FR accessories

FR ACCESSORIES		Standard hook	Silver Gold Bronze White Black	50110.01 50110.02 50110.03 50110.06 50110.09
AC			SST	76204.05
FR		Short hook	Silver Gold Bronze White Black	50128.01 50128.02 50128.03 50128.06 50128.09
			SST	50128.05
		Special flat hook	Silver Gold Bronze White Black SST	50123.01 50123.02 50123.03 50123.06 50123.09 76253.05
		Supplement	Chrome	50131.07
	0 0 0 0	hook	Chrome	50151.07
	00000	Fitting plate for hook	Silver Gold Bronze White Black	50140.01 50140.02 50140.03 50140.06 50140.09
		Bracket for sliding door	Silver Gold Bronze White Black	50141.01 50141.02 50141.03 50141.06 50141.09

64

Antipanic reversible modular				
	4			Box (x1)
A [AP 1 C E	White Black Grey	A-7010.06 A-7010.09 A-7010.16
		AP 2 C E	White Black Grey	A-7020.06 A-7020.09 A-7020.16
		АР 3 С Е	White Black Grey	A-7030.06 A-7030.09 A-7030.16
0		Horizontal bar 950 mm	Silver Black Red Green	A-7120.01 A-7120.09 A-7120.11 A-7120.13
_			SST	A-7120.05
¢		Horizontal bar 1150 mm	Silver Black Red Green	A-7121.01 A-7121.09 A-7121.11 A-7121.13
			SST	A-7121.05
6		Horizontal bar 1450 mm	Silver Black Red Green SST	A-7122.01 A-7122.09 A-7122.11 A-7122.13 A-7122.05
			221	A-/122.05



Antipanic reversible PUSH-BAR

			Box (x1)
۳ هستان ۲ د و	PB 1 840 mm	Black / Black Black / Red Black / Silver	A-6011.09 A-6011.12 A-6011.17
	PB 1 1170 mm	Black / Black Black / Red Black / Silver	A-6012.09 A-6012.12 A-6012.17
<u></u>	PB 2 840 mm	Black / Black Black / Red Black / Silver	A-6021.09 A-6021.12 A-6021.17
	PB 2 1170 mm	Black / Black Black / Red Black / Silver	A-6022.09 A-6022.12 A-6022.17
ـــــــــــــــــــــــــــــــــــــ	PB 3 840 mm	Black / Black Black / Red Black / Silver Steel finish	A-6031.09 A-6031.12 A-6031.17 A-6031.18
	PB 3 1170 mm	Black / Black Black / Red Black / Silver Steel finish	A-6032.09 A-6032.12 A-6032.17 A-6032.18

AP and PB accessories

ſ	Handle outside trim					
(Open/cl	osed	White Black Grey	A-7100.06 A-7100.09 A-7100.16		
	Dpen/cl same ke		White Black Grey	A-7101.06 A-7101.09 A-7101.16		
ι	Jniverso	1	White Black Grey	A-7108.06 A-7108.09 A-7108.16		
	Jniverso same ke		White Black Grey	A-7105.06 A-7105.09 A-7105.16		
	D	Oval handle outside trim				
(Open/cl	osed	White Black Grey	A-7106.06 A-7106.09 A-7106.16		
	Open/cl same ke		White Black Grey	A-7107.06 A-7107.09 A-7107.16		
l	Jniverso	1	White Black Grey	A-7109.06 A-7109.09 A-7109.16		
	Jniverso same ke		White Black Grey	A-7103.06 A-7103.09 A-7103.16		
Z	F	Outer handle	White Black Grey	A-7150.06 A-7150.09 A-7150.16		
6	Start Start	Outer cylinder locl	- <	A-7212		
		Vertical rods and latch bolts <2,66 m	White Black Grey Steel finish	A-7110.06 A-7110.09 A-7110.16		

<2,66 m

Vertical rods White

and lateral Black

latch bolts Grey

A-7115.06

A-7115.09

A-7115.16

Steel finish A-7115.18

AP and PB spare parts

AP / PB SPARE PARTS	000	Floor strike	-	A-7200
		Side strike	-	A-7205
AP / PB S	Ĩ	Adjustable side strike	-	A-7207
	Ð	Cylinder only for 7100	-	A-7210
	F	Cylinder same keys	-	A-7211



Door	Chrome
selector	
CE	



Box (x1) B-3110.07



Blister (x1)

B-3013.07



Door holder	Chrome	

CO · FP



Adjustable Negro CO: WB air centering elevator

W-3210.09

65

OJustor



www.justor.com

The photographs, images, contents and products presented in this catalogue are of illustrative and orientative character, therefore they will not generate any right or expectation of right, nor are they a binding commercial offer, being they protected by intellectual and industrial property rights in favour of Talleres Trepat S.A.



Talleres Trepat S.A.

Zona industrial "Els Garrofers" Avda. del Progrés, 40 08340 Vilassar de Mar (Barcelona) SPAIN

T. +34 937 540 600

spain sales department
trepatventas@justor.com

export department ttrepatexport@justor.com

www.justor.com

